Day-Brite CFI

Recessed

DSRT Selectable Troffer

Selectable or Static Lumens & CCT

Slim, sturdy and selectable

The DSRT Selectable Troffer combines robust construction, a slim design, and low glare for versatile applications.

Day-Brite/CFI DSRT Selectable Troffer is a robust low glare luminaire designed to provide three lumen and three CCT field selectable options per size or with static CCT and lumen options when required. Available for use in recessed, suspended and surface mount applications. Ideal for general lighting applications such as open office, schools, healthcare, and retail.

Visit https://www.genlyte.com/en-us/support/warranties for more information on Signify's standard 5-year limited warranty.

Not all product variations listed on page are DLC qualified. To ensure that a specific model is qualified, visit www.designlights.org/search

Lumen Select Switch · CCT with Select Switch · UNV Auto Sensing 120–277V · interact ready · DLC LISTED

DSRT Selectable Troffer

Selectable or Static Lumens & CCT

Features

- **Color Selectable or Static:** 3500/4000/5000K @ 80 CRI
- **Lumen Selectable or Static:**
  - 1x4: 3000/4000/5000lm or 4000/5000/6000lm
  - 2x2: 2800/3500/4200lm or 4000/5000/6000lm
  - 2x4: 3800/4800/5500lm or 5500/7000/8000lm
- **Voltage:** UNV 120-277V, 347
- **Housing:** Shallow 2 ¾" depth
- **Lenses:** 4 options:
  - Round or Square
  - Prismatic or Ribbed
- **Sensor:** Basic Daylight & Occupancy, Signify Interact, Lutron Athena, Lutron Vive

Ordering guide

example: 2DSRT42L835-2-SR-UNV-DIM-SWZCS

Size	Family	Lumens (nom.) [1]	Color [1]	Length	Center Diffuser	Voltage	Driver	Options (Factory Installed)
1x4	1DSRT	**3050L** 3000/4000/5000lm Selectable **4060L** 4000/5000/6000lm Selectable **30L** 3000lm **40L** 4000lm **50L** 5000lm **60L** 6000lm	**8CS** CRI 80, 3500K/4000K/5000K Selectable **835** CRI 80, 3500K **840** CRI 80, 4000K **850** CRI 80, 5000K	**4** 4'	**RS** Round Smooth (Prismatic) **RR** Round Ribbed **SS** Square Smooth (Prismatic) **SR** Square Ribbed	**UNV** Universal 120-277V **347** 347V	**DIM** Dimming	**F1** [6] 3/8" Flex, 18 ga., 6'; 3 Leads (Non-Dimming) **F2** 3/8" Flex, 18 ga., 6'; 4 Leads (Non-Dimming + Emergency) **F2/5W** [5,6] 3/8" Flex, 18 ga., 6'; 5 Leads (Dimming) **F2/6W** [5] 3/8" Flex, 18 ga., 6'; 6 Leads (Dimming + Emergency) **GLR** Fusing, Fast Blow **DSC** [7] Quick Driver Disconnect **CHIC** [9] Chicago Plenum Rated **EM10** [3,7] Bodine 10W Integral Battery Pack and Test Switch **EM14** [3,7] Bodine 14W Integral Battery Pack and Test Switch **ER100** [3,6,7] UL924 Sensor Bypass Relay, Factory Installed between Driver and Sensor **DAYOCC** [1,4,8] Basic Daylight and Occupancy **SWZCS** [1,5,10] Signify Interact Sensor (Day/Occ) **RADIO** [1,5,10] Signify Interact Radio Node **IAOSB** [1,5,10] Signify Interact Enterprise Sensor Bundle (Day/Occ + IoT) **AWNOCC** [5] Lutron Athena Sensor AWNS (Day/Occ) **AWNRF** [5] Lutron Athena Radio Node AWNR **VIVEOCC** [5] Lutron Vive Sensor VDO (Day/Occ) **VIVERF** [5] Lutron Vive Radio Node VRF **AG** Antimicrobial Finish
2x2	2DSRT	**3050L** 2800/3500/4200lm Selectable **4060L** 4000/5000/6000lm Selectable **28L** 2800lm **35L** 3500lm **42L** 4200lm **60L** 6000lm	**8CS** CRI 80, 3500K/4000K/5000K Selectable **835** CRI 80, 3500K **840** CRI 80, 4000K **850** CRI 80, 5000K	**2** 2'				
2x4	2DSRT	**4060L** 3800/4800/5500lm Selectable **6080L** 5500/7000/8000lm Selectable **38L** 3800lm **48L** 4800lm **55L** 5500lm **70L** 7000lm **80L** 8000lm	**8CS** CRI 80, 3500K/4000K/5000K Selectable **835** CRI 80, 3500K **840** CRI 80, 4000K **850** CRI 80, 5000K	**4** 4'				

1. Integral control options dimmable to 1% via wireless wall switch.
2. Surface kits and powered supsension kits not available with **FPEMLEDRM10** accessory
3. **ER100** not available with **EM10** and **EM14** options. **ER100** only available with Interact & Lutron sensor options.
4. **DAYOCC** not available with **ER100**
5. **F2/5W** and **F2/6W** not available with Interact & Lutron sensors.
6. **F1**, **F2/5W**, and **DSRT-CKT-WP** not available with Emergency options.
7. **DSC** and/or **347V** not available with **EM10**, **EM14**, **ER100**, and **FPEMLED10RM** emergency options.
8. **6080L**, **70L**, and **80L** not available with **DAYOCC**
9. **Chicago Plenum** not available with **Selectable** configurations.
10. Must order **IRT9015** Interact commissioning remote with each system order.

Visit https://www.genlyte.com/en-us/support/warranties for more information on Signify's standard 5-year limited warranty.

Not all product variations listed on page are DLC qualified. To ensure that a specific model is qualified, visit www.designlights.org/search

Lumen Select Switch · CCT with Select Switch · UNV Auto Sensing 120-277V · interact ready

DSRT Selectable Troffer

Selectable or Static Lumens & CCT

Stocking Table

12NC	Catalog Code	Material Description
911401810587	1DSRT3050LCS-4-UNV-DIM	DSRT Selectable Troffer 1x4, RS Diffuser
912401711065	2DSRT3050LCS-2-UNV-DIM	DSRT Selectable Troffer 2x2, RS Diffuser
912401711066	2DSRT4060LCS-4-UNV-DIM	DSRT Selectable Troffer 2x4, RS Diffuser
912401711111	2DSRT3050LCS-2-UNV-DIM-DAYOCC	DSRT Selectable Troffer 2x2, RS Diffuser w/ DayOcc
912401711112	2DSRT4060LCS-4-UNV-DIM-DAYOCC	DSRT Selectable Troffer 2x4, RS Diffuser w/ DayOcc
912401711249	2DSRT3050LCS-2-UNV-DIM-EM10RM	DSRT Selectable Troffer 2x2, RS Diffuser w/ 10W Battery
912401711250	2DSRT4060LCS-4-UNV-DIM-EM10RM	DSRT Selectable Troffer 2x4, RS Diffuser w/ 10W Battery
911401838687	DSRT-CKT-NP	DSRT/SBP Suspension Pack - No Power
911401838787	DSRT-CKT-WP	DSRT/SBP Suspension Pack - with Power
911401838887	1DSRT-4-SKT	DSRT 1x4 Surface Mount Frame
911401838987	2DSRT-2-SKT	DSRT 2x2 Surface Mount Frame
911401839087	2DSRT-4-SKT	DSRT 2x4 Surface Mount Frame

Visit https://www.genlyte.com/en-us/support/warranties for more information on Signify's standard 5-year limited warranty.

Not all product variations listed on page are DLC qualified. To ensure that a specific model is qualified, visit www.designlights.org/search

Lumen Select Switch · CCT with Select Switch · UNV Auto Sensing 120-277V · interact ready · DLC LISTED

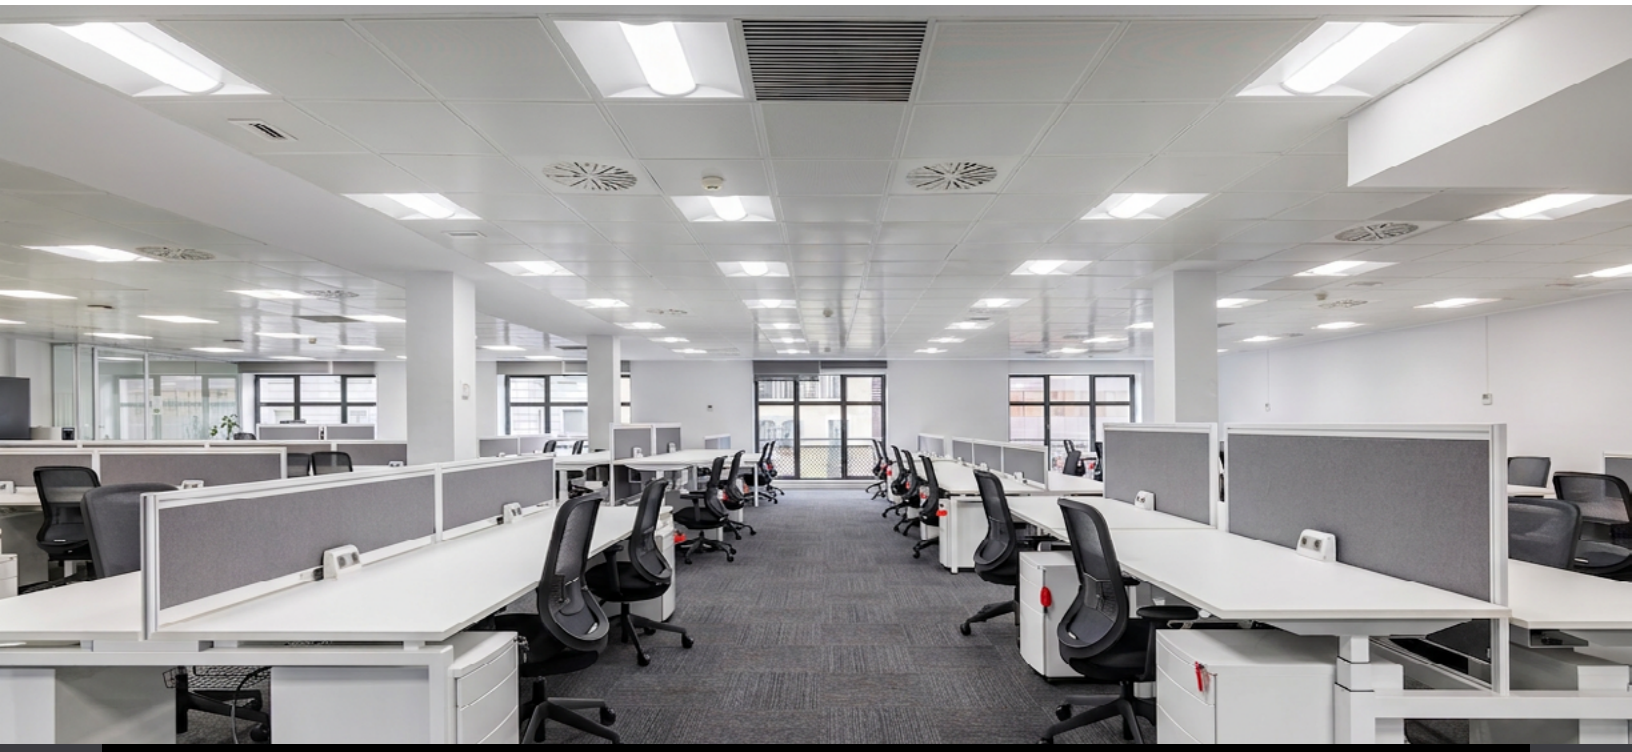

© 2026 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify.

GENLYTE SOLUTIONS
a signify business

Signify North America Corp.
400 Crossing Blvd, Suite 600
Bridgewater, NJ 08807
Telephone: 800-555-0050

Signify Canada Ltd.
281 Hillmount Road,
Markham, ON, Canada L6C 2S3
Telephone: 800-668-9008

All trademarks are owned by Signify Holding or their respective owners.