

CHLORIDE

by Signify


INSTALLATION & OPERATION INSTRUCTIONS

SURFACE MOUNTING AND RED AND GREEN UNIVERSAL LED EXIT SIGN

AC ONLY / TWO GROUP AC INPUT

Package Contents

Part	Description	Quantity
1	LED Edge-Lit EXIT Sign	1
2	Canopy	1
3	Hardware Bag	1



Warnings and Cautions

IMPORTANT SAFEGUARDS

READ AND FOLLOW ALL SAFETY INSTRUCTIONS.


When using electrical equipment, basic safety precautions should always be followed including the following

1. Before starting the installation, disconnect the power by turning off the circuit breaker or by removing the appropriate fuse at the fuse box. Using the light switch to turning the power off is not sufficient to prevent electrical shock.
2. Do not use outdoors.
3. Do not mount near gas or electric heaters.
4. Equipment should be mounted in locations and at heights where it will not be subjected to tampering by unauthorized personnel.
5. The use of accessory equipment not recommended by the manufacturer may cause an unsafe condition.
6. Do not use this equipment for other than its intended use.
7. All servicings should be performed by a qualified personnel only.
8. Don't use alcohol or other detergents wipe or touch chevrons.

SAVE THESE INSTRUCTIONS

ELECTRICAL CONNECTIONS

- If using 120VAC, connect the black and white wires to the building utility.
- If using 277VAC, connect the orange and white wires to the building utility.
- Connect ground wires to building utility.
- Cap off unused wires. In all cases, use standard wire nuts in connection to wires.

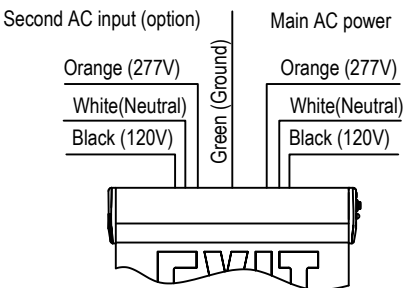


DETERMINE DIRECTION

- If need indicator, remain indicator and remove instruction film.
- If no need indicator, remove indicator and instruction film together.



RED AND GREEN COLOR CHANGEABLE

1. This product default setting is red color.
2. Slide the knob of slider switch to another side, then change to green color.




Mounting Instructions


NOTE: First turn off electricity.

Surface Ceiling & Wall Mounting


1. Attach crossbar to junction box.(TM8#-32*1")
2. Use screwdriver open front cover.
3. Red exit sign can change to green exit sign if need (See *RED AND GREEN COLOR CHANGEABLE*).

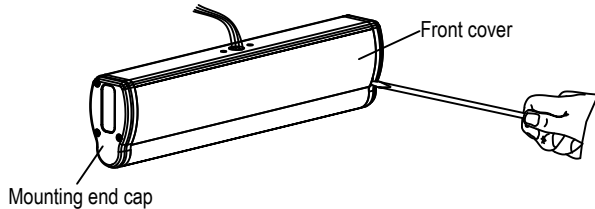

4. Feed AC supply wires through canopy center hole.
5. Assemble canopy onto main body assembly with (2) PM4*12 screws(supplied) and make proper wire connections.
(See *ELECTRICAL CONNECTIONS*).
6. Use (2) PM4-40 screws (supplied) tighten canopy to crossbar.

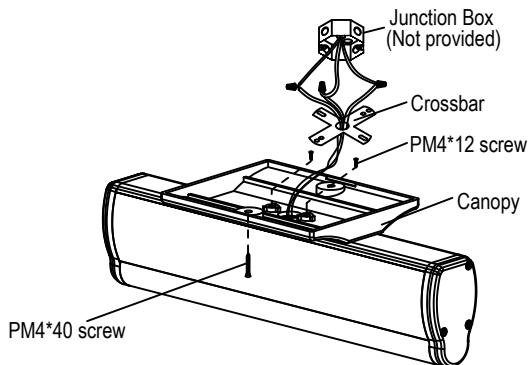


7. Insert EXIT panel into main body assembly gently. If EXIT panel is for single face, make sure EXIT letter direction is right.

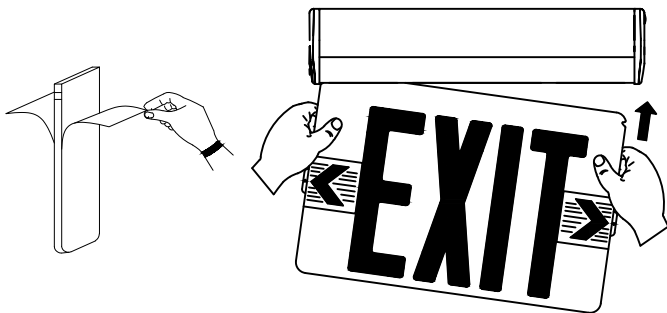


8. Determine direction for chevron placement.
(See *DETERMINE DIRECTION*)

9. The unit can be installed on any surface, you may rotate the EXIT panel in any angle from 0° to 180°, Ceiling mounting rotate 90° become Wall mounting.


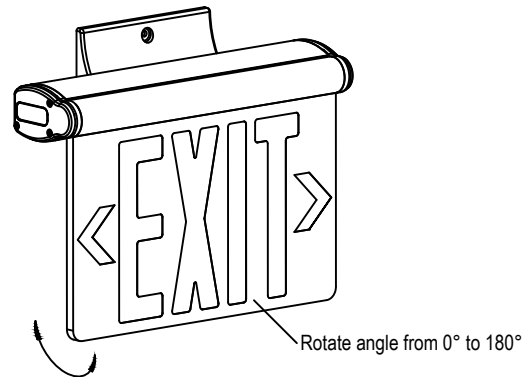


Surface End Mounting

1. Attach crossbar to junction box.
2. Use screwdriver open front cover to connect battery connector.
3. Red exit sign can change to green exit sign if need
(See *RED AND GREEN COLOR CHANGEABLE*).
4. Remove the hole plug from mounting end cap.
5. Pull out all AC supply wires and feed wires thru the center holes of mounting end cap and then canopy.
6. Reference 5 - 9 step in surface ceiling & wall mounting above for surface end mounting.

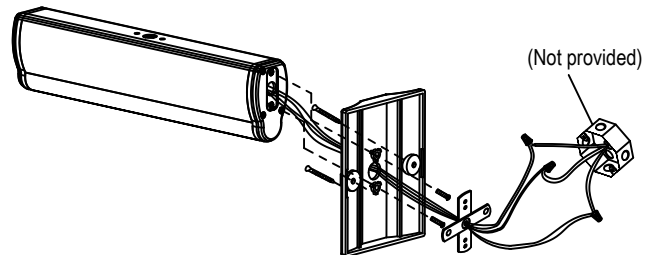

Replace the acrylic panel

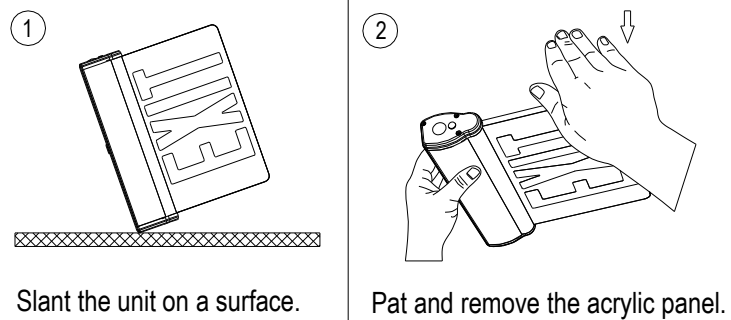

Assemble the alternative acrylic panel to the housing.