



Designed for projects, built for stock

Providing high quality illumination, LytePro is available in 3 sizes with three optical distributions, multiple lumen packages, and is suitable for a range of mounting heights. Choose from select models ready to ship, or build the exact combination you need.

Features

- Three sizes to accommodate multiple mounting heights
- Lumen output ranges from 1,000 to 13,500 with efficacies up to 170 LPW
- Outdoor Interact Ready, Photocell button, motion response, battery pack, and field adjustable wattage options available with LPW32
- Types 2, 3, and 4 optical distributions available with Back Light Control shielding option
- 3000K and 4000K color temperatures available
- All models are DLC qualified
- 5 year limited warranty

Benefits

- Low-profile design to complement and blend in with surroundings
- Provides energy saving replacement for incandescent, compact fluorescent and HID lamp sources up to 320W
- Optical distributions offer full cutoff performance and excellent uniformity for precise wall and area illumination
- Easily mounts to a variety of junction box types or fastens directly to wall for seamless retrofitting
- Outstanding long life provides maintenance savings

Dependable quality for peace of mind

Available in a variety of models across three sizes, the LytePro wall sconce provides high quality illumination and outstanding lifetime, supporting both energy and maintenance savings.

Product comparison



	LPW7	LPW16	LPW32
Distribution	Type 2	Type 2, 3, or 4	Type 2, 3, or 4
Lumen output range (4000K)	1,050	2500/4500/6000	1 board - 2500/4500/6000 2 board - 8000/10000/12500
Average system watts	10	19/33/48	1 board - 19/33/49 2 board - 53/69/91
Efficacy	108	130-170	130-170
Voltage	UNV	UNV, HVU	UNV, HVU
Color temperature	3000K, 4000K	3000K, 4000K	3000K, 4000K
Recommended mounting height range	7'-10'	10-15'	10-25'
DarkSky compliant	✓	✓	✓
Ambient temp. rating	-40°C to 40°C (-40°F to 104°F)	-40°C to 40°C (-40°F to 104°F)	-40° to 40°C (-40° to 104°F)
Approx. luminaire weight	4 lbs (1.8Kg)	6 lbs (2.7Kg)	9 lbs (4Kg) or 11 lbs (5Kg) with EBP
IP-Rating	IP65	IP66 LED boards/IP54 Housing	IP66 LED boards/IP54 Housing
DLC Qualified	✓	✓	✓
Photocontrol button	✓	✓	✓
Field Adjustable Wattage Selector (FAWS)	✗	✓	✓
Motion response	✗	✗	✓
Outdoor Interact (WIAP)	✗	✗	✓
Emergency Battery Backup (0° to 40°C)	✗	✗	✓

Outdoor Interact (WIAP)



Photocontrol Button (PCB)



Motion Response (BL50L3)




Universal Mounting Plate Accessory (LPWCVRPLT-BZ)




Designed to meet any application needs

The wall sconce features exceptional value in a compact, architectural design. This powerful and precise combination offers excellent photometric performance and uniformity for precise wall and area illumination.

Optical distributions

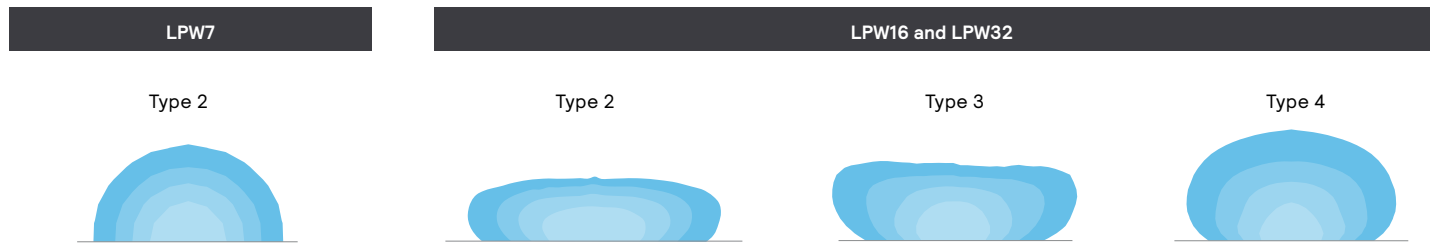

Mounting height guide

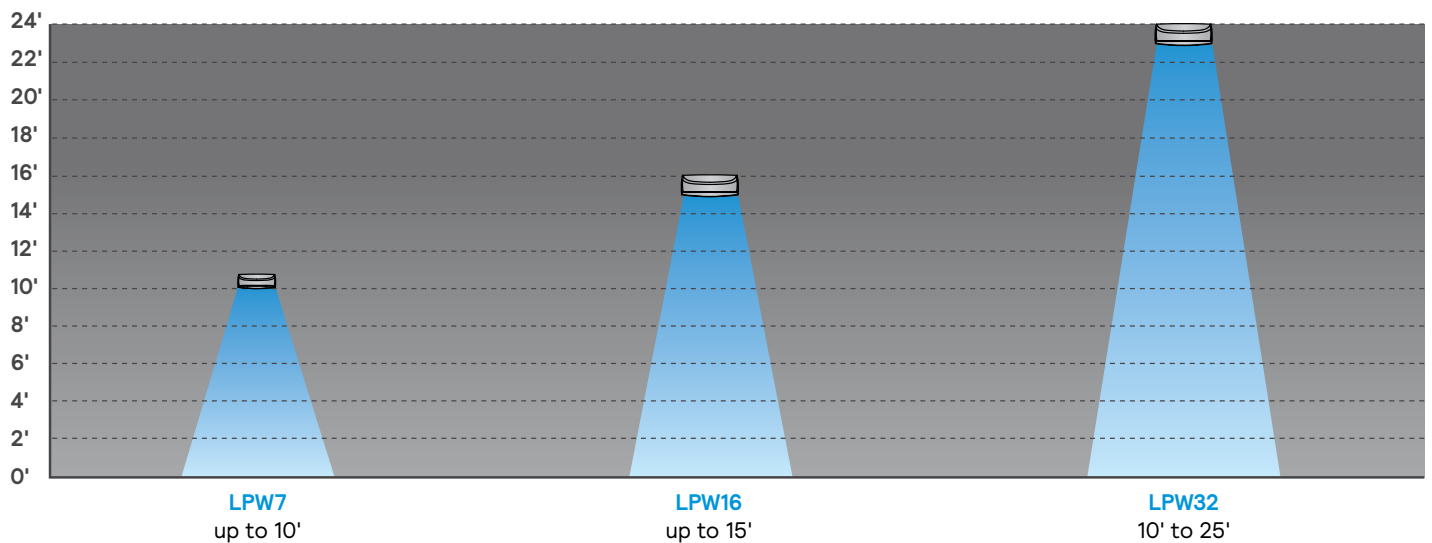

LytePro Wall ordering information

For a complete list of configurations and ordering information, download the spec sheets at stonco.com and keene-lighting.com. Our select list of stocked luminaires is shown below.

Stocked luminaires

Catalog Number	Description	Master Pack, Qty	12NC Code
LPW7			
LPW7-1L-740-2-UNV-BZ	LytePro Wall 7, 1000 lm, 4000K, Type 2, 120-277V, Bronze	6	912300006480
LPW7-1L-740-2-UNV-DGY	LytePro Wall 7, 1000 lm, 4000K, Type 2, 120-277V, Dark Gray	6	912300006481
LPW16			
LPW16-6L-740-3-UNV-FAWS-BZ	LytePro Wall 16, 6000 lm, 4000K, Type 3, 120-277V, Field Adjustable Wattage Selector Bronze	6	912300006482
LPW16-6L-740-3-UNV-FAWS-DGY	LytePro Wall 16, 6000 lm, 4000K, Type 3, 120-277V, Field Adjustable Wattage Selector, Dark Gray	6	912300006483
LPW32			
LPW32-6L-740-3-UNV-FAWS-BZ	LytePro Wall 32, 6000 lm, 4000K, Type 3, 120-277V, Field Adjustable Wattage Selector, Bronze	3	912300006484
LPW32-6L-740-3-UNV-FAWS-DGY	LytePro Wall 32, 6000 lm, 4000K, Type 3, 120-277V, Field Adjustable Wattage Selector, Dark Gray	3	912300006485
LPW32-12L-740-3-UNV-FAWS-BZ	LytePro Wall 32, 12500 lm, 4000K, Type 3, 120-277V, Field Adjustable Wattage Selector, Bronze	3	912300006486
LPW32-12L-740-3-UNV-FAWS-DGY	LytePro Wall 32, 12500 lm, 4000K, Type 3, 120-277V, Field Adjustable Wattage Selector, Dark Gray	3	912300006487

Stocked accessories (must be ordered separately)

Catalog Number	Description	Master Pack, Qty	UPC Code
LPWCVRPLT-BZ*	LPW Universal wall cover mounting plate, Bronze textured paint	(none)	786034960618

*Other colors available upon request as made-to-order.



© 2026 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify.

GENLYTE
SOLUTIONS
a  **signify** business

Signify North America Corp.
400 Crossing Blvd, Suite 600
Bridgewater, NJ 08807
Telephone: 800-555-0050

Signify Canada Ltd.
281 Hillmount Road,
Markham, ON, Canada L6C 2S3
Telephone: 800-668-9008

All trademarks are owned by Signify Holding or their respective owners.