


Gardco and Stonco Keene feature multiple floodlights ranging from specification grade to high output. Specialized optics are designed for optimal performance for a range of floodlighting applications. Multiple options and accessories allow you to customize your floodlighting solution.

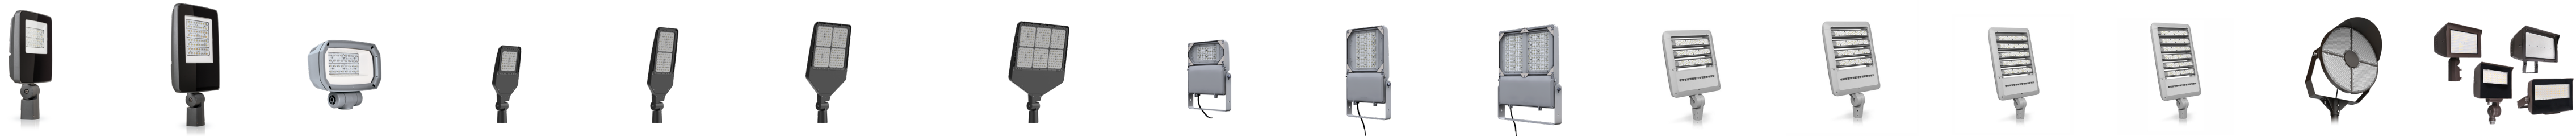

Brand	GARDCO		GARDCO	GARDCO		GARDCO		GARDCO		GARDCO		GARDCO		GARDCO		STONCO KEENE	STONCO KEENE		
Rating	Best		Best	Better		Better		Better		Better		Better		Better		Good	Good		
Product	ClearScope Small	ClearScope Medium	Designer Floodlight LED	OptiForm Flood Small	OptiForm Flood Medium	OptiForm Flood Large	OptiForm Flood X-Large	DuraForm Small	DuraForm Medium	DuraForm Large	PowerForm LED High output floodlight	PowerForm LED High output floodlight	PowerForm LED High output floodlight	PowerForm LED High output floodlight	GameFlood Rec Sports	SlimFlood Selectable			
Prefix	CSFS	CSFM	DFL7/DFC7	OFD-S	OFD-M	OFD-L	OFD-XL	FLDS	FLDM	FLDL	PFF-138L	PFF-184L	PFF-230L	PFF-276L	GMFL	SF			
Lumen Output Range	2,223-14,796	13,912-29,386	2,487-11,402	6,272-22,309	19,748-34,228	30,604-86,710	75,824-147,787	3,128-13,359	10,621-28,693	18,994 - 58,944	42,284-69,288	56,379-92,384	70,474-115,480	84,568-138,576	60,258-101,903	1500 - 45800			
Efficacy	106-125	109-127	99-150	133-181	145-186	136-193	129-184	99-141	101-140	103-149	123-158	126-158	125-158	125-158	155-170	145			
Distributions	Spot (NEMA 2x2), Rectangular Spot (NEMA 3x3), Asymmetric 33 Flood (NEMA 6x5), Rectangular Medium Flood (NEMA 7x4), Rectangular Narrow Flood (NEMA 7x5)			Medium Spot (NEMA 3x3), Narrow Flood (NEMA 4x4), Medium Flood (NEMA 5x5), Wide Flood (NEMA 6x6), Asymmetric 33 Flood (NEMA 6x5)		Medium Spot (NEMA 3x3), Narrow Flood (NEMA 4x4), Medium Flood (NEMA 5x5), Wide Flood (NEMA 6x6), Asymmetric 33 Flood (NEMA 6x5), Airport Apron Flood (NEMA 7x5)		Spot (NEMA 2x2), Rectangular Spot (NEMA 3x3), Narrow Flood (NEMA 4x4), Medium Flood (NEMA 5x5), Wide Flood (NEMA 6x6), NEMA 7x6, Asymmetric 33 Flood (NEMA 6x5), Rectangular Medium Flood (NEMA 7x4), Rectangular Narrow Flood (NEMA 7x5)			Spot (NEMA 3x3), Asymmetric (NEMA 6x5), Rectangular Medium Flood (7x4), Airport Apron Flood (AIRP)				NEMA 3x3, 4x4, 5x5, 6x6		90°/75°/55° (Field Selectable)		
Color Temperature	3000, 4000, 5000	3000, 4000, 5000	3000, 4000, 5000	3000, 4000, 5000 (2700K available as special)				3000, 4000 (5000 available as special)				3000, 4000	3000, 4000	3000, 4000	3000, 4000	4000, 5000	3000, 4000, 5000 (Field Selectable)		
Field Adjustable Wattage Selector (FAWS)	✓	✓	-	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	Selectable	
Wireless Controls	-	-	-	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	-	
Photocell	Photocontrol Button, Twist Lock 5-Pin receptacle		Button	Photocontrol Button, NEMA 7-pin Twist Lock Receptacle				Photocontrol Button, Tool-less NEMA Twist Lock 7-pin receptacle				Photocontrol Button, Twist Lock Receptacle 7-pin, Twist Lock 5-pin Receptacle with 3-pin Photocell				-	✓		
Mounting	Slip Fitter, Trunnion	Slip Fitter, Trunnion	Knuckle mount fits on 1.5" rigid conduit with numerous mounting accessories	Slip fitter (2-3/8" and 3"), Trunnion, Adjustable Wall, Adjustable Post Top, Adjustable Arm, Adjustable Mast Arm		Slip fitter (2-3/8" and 3"), Trunnion, Adjustable Post Top, Adjustable Arm, Adjustable Mast Arm		Slip fitter (2-3/8" and 3"), Trunnion, Adjustable Arm, Adjustable Mast Arm		Slip Fitter, Slipfitter with external cord, Yoke Mount				Slip Fitter, Yoke Mount	Slip Fitter, Yoke Mount	Slip Fitter, Yoke Mount	Slip Fitter, Yoke Mount	Yoke	Knuckle, Yoke, Slip Fitter, Trunnion
Mounting Accessories	Surface Mount Base Plate, Wall Mount Bracket, Surface Mount Tenon, Junction Box with SMT2		Multiple Mounting Accessories available - see spec sheet	Retrofit Mounting Bolster Plate, Multiple Mounting Brackets (sold separately)				Multiple Bullhorns and Mounting Accessories sold separately				Stanchion Mount, Wall Brackets, Tenon Reducer Brackets, Multiple Bullhorn Brackets				Yoke to Tenon Mounting Adaptor, Laser Aiming Device	Dual Mounting in each carton Knuckle, Yoke / Slip Fitter, Trunnion		
Shielding Options	Internal Concentric Glare Louvers, Barn Doors		Cutoff Hood	Glare Shield (for 3x3 and 4x4), Front Side Shield (for A33)		Glare Shield (for 3x3 and 4x4), Front Side Shield (for A33), Front Side Shield (for AIR)		Top or Bottom Visor, Left or Right Glare Shield				Louvered Glare Shields, Internal House Side Shields				Standard visor	-		
Finish	Textured: Bronze, White, Black, Medium Grey, Dark Grey, Custom Color	Textured: Bronze, White, Black, Medium Grey, Dark Grey, Custom Color	Textured: Bronze, White, Black, Medium Grey, Dark Grey, Custom Color	Textured: Bronze, White, Black, Medium Gray, Dark Gray, Custom Color				Textured: Bronze, Black, Medium Grey, Custom Color	Textured: Bronze, Black, Medium Grey, Custom Color	Textured: Bronze, Black, Medium Grey, Custom Color	Textured: Bronze, White, Black, Medium Grey, Dark Grey, Custom Color	Textured: Bronze, White, Black, Medium Grey, Dark Grey, Custom Color	Textured: Bronze, White, Black, Medium Grey, Dark Grey, Custom Color	Textured: Bronze, White, Black, Medium Grey, Dark Grey, Custom Color	Textured: Bronze, White, Black, Medium Grey, Dark Grey, Custom Color	Textured: Black	Bronze		
Salt Spray	1000 hours	1000 hours	-	3000hrs Marine Grade available"	3000hrs Marine Grade available"	3000hrs Marine Grade available"	3000hrs Marine Grade available"	5000 Hours Marine Grade available	5000 Hours Marine Grade available	5000 Hours Marine Grade available	-	-	-	-	-	-	500 Hours		
Additional Options	Wire Guard, Stone Guard, 20kV/10kA Surge Protection, Fusing (in luminaire), Dimming Leads Externally Accessible (for controls by others)		Wire Guard, Polycarb Shield, Extended Splice Box, 20kV/10kA Surge Protection, Fusing, Dimming Leads Externally Accessible (for controls by others)	20kV/10kA Surge Protection, Fusing, Remote Kits, Dimming Leads Externally Accessible (for controls by others)				Wire Guard, ANSI Labels, Tool-less latches, Vandal Proof Access, DALI Driver, 20kV/10kA Surge Protection, customer-specified Cord Length, Fusing (in luminaire), Dimming Leads Externally Accessible (for controls by others)				20kV/10kA Surge Protection, Fusing (in luminaire), Pole Mount Fusing, Dimming Leads Externally Accessible (for controls by others)				20kV/10kA Surge Protection, Remote Driver by ETO	-		
IP Rating	IP66	IP66	IP66	IP66	IP66	IP66	IP66	IP66	IP66	IP66	IP66	IP66	IP66	IP66	IP66	IP66	IP65		
Vibration	Bridge and Overpass	Bridge and Overpass	-	Normal	Normal	Normal	Normal	Bridge and Overpass	Bridge and Overpass	Bridge and Overpass for Yoke, Normal for Slip Fitter	Bridge and Overpass	Bridge and Overpass	Bridge and Overpass	Normal	Normal	-			
IK Rating	IK07	IK07	-	IK08	IK08	IK08	IK08	IK09	IK09	IK09	IK10	IK10	IK10	IK10	-	IK07			
DLC Listing	Standard and Premium	Standard and Premium	Standard and Premium	Standard and Premium	Standard and Premium	Standard and Premium	Standard and Premium	Standard and Premium	Standard and Premium	Standard and Premium	Standard and Premium	Standard and Premium	Standard and Premium	Standard and Premium	DLC Premium	DLC Premium			
Certifications	cULus	cULus	cULus	cULus, Zhaga-D4i	cULus, Zhaga-D4i	cULus, Zhaga-D4i	cULus, Zhaga-D4i	cULus	cULus	cULus	cULus	cULus	cULus	cULus	cULus	cULus			
BAC Compliance	-	-	-	Coming soon	Coming soon	Coming soon	Coming soon	Optional	Optional	Optional	Optional	Optional	Optional	Optional	-	-			
Lifetime	L70-100,000h	L70-100,000h	L70-100,000h	L70-102,000h	L70-102,000h	L70-102,000h	L70-102,000h	L70-100,000h	L70-100,000h	L70-100,000h	L70-100,000h	L70-100,000h	L70-100,000h	L70-100,000h	L70-100,000h	L70-100,000h			
Limited Warranty	5 year	5 year	5 year	5 years	5 years	5 years	5 years	10 year	10 year	10 year	5 year	5 year	5 year	5 year	5 years	5 years			
Link																			